


Wciągnik stacjonarny (na łapach)

Seria M, 2 liny (olinowanie 2/1)

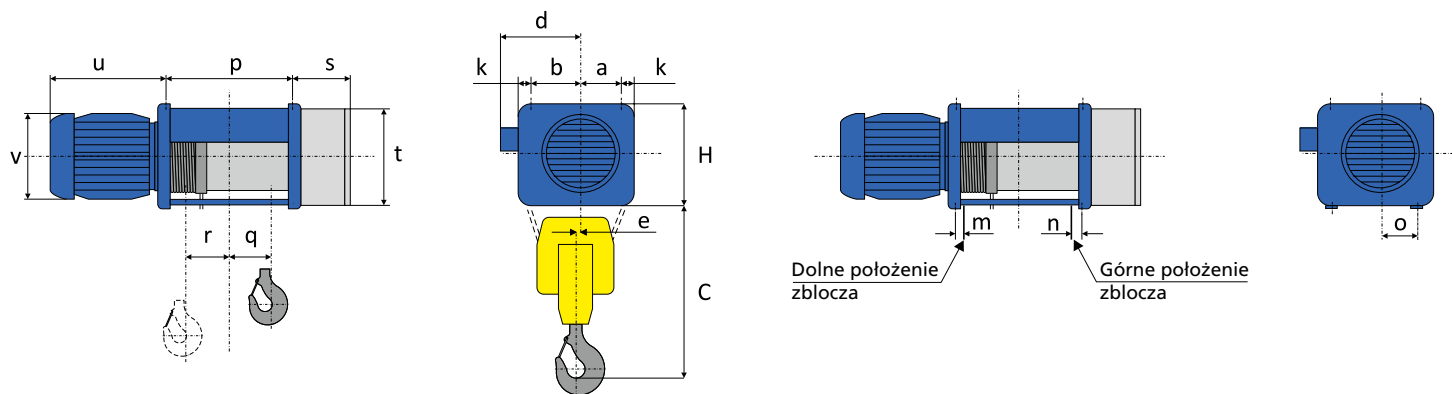

Wciągnik stacjonarny (na łapach) – Seria M, 2 liny (olinowanie 2/1)

Typ wciągnika	Udźwig [t]	FEM	Lina [mm]	Wysokość podnoszenia [m]	Stałe wymiary [mm]								Zmienne wymiary [mm]								Waga [kg]			
					C	H	a	b2	k	d	e	m	n	o	p	q	r	s	t	u(V1)		v(V1)	u(V2)	v(V2)
M740	8	2 m	Ø15	14	850	530	167,5	307,5	80,5	470	64	50	75	178	553	148	78	299	400	674	311	512	410	600
	8	2 m	Ø15	19	850	530	167,5	307,5	80,5	470	64	50	75	178	713	178	128	299	400	674	311	512	410	654
	8	2 m	Ø15	26	850	530	167,5	307,5	80,5	470	64	50	75	178	928	285	128	299	400	674	311	512	410	713
M750	10	1 Am	Ø15	14	850	530	167,5	307,5	84,5	465	64	50	75	178	553	148	78	250	400	453	440	750	330	640
	10	1 Am	Ø15	19	850	530	167,5	307,5	84,5	465	64	50	75	178	713	178	128	250	400	453	440	750	330	685
	10	1 Am	Ø15	26	850	530	167,5	307,5	84,5	465	64	50	75	178	928	285	128	250	400	453	440	750	330	760
M950	10	2 m	Ø20	20	1030	624	200	340	92	515	66,5	55	90	210	840	228	118	314	400	517	470	523	470	1140
	10	2 m	Ø20	32	1030	624	200	340	92	515	66,5	55	90	210	1255	435	118	314	400	517	470	523	470	1280
M1125	25	1 Am	Ø30	20	1325	804	232,5	452,5	137,5	705	89	75	120	276,5	977	305	105	415	400	589	470	589	470	2350
	25	1 Am	Ø30	24	1325	804	232,5	452,5	137,5	705	89	75	120	276,5	1162	400	100	415	400	589	470	589	470	2430
	25	1 Am	Ø30	30	1325	804	232,5	452,5	137,5	705	89	75	120	276,5	1402	520	100	415	400	589	470	589	470	2690

Powyższe dane obowiązują dla podanej grupy natężenia pracy (FEM). Dla wciągników w innej grupie należy posłużyć się tabelą M2-2 m/3 m. Wszystkie wymiary odnoszą się do „Produktów Standardowych”, w przypadku pozostałych produktów prosimy o kontakt z firmą Transrem Sp. z o.o.

Wciągnik stacjonarny (na łapach) – Seria M, 2 liny (olinowanie 2/1)

Typ wciągnika	Udźwig [t]	Wysokość podnoszenia [m]	Pozycja haka	Nacisk na koło [kg]			
				R1	R2	R3	R4
M740	8	14	uep	2993	3148	906	953
	8	14	dep	1400	1472	2499	2629
	8	19	uep	2923	3074	976	1027
	8	19	dep	1250	1314	2649	2787
	8	26	uep	3147	3310	752	791
	8	26	dep	1412	1485	2487	2616
M750	10	14	uep	3741	3936	1132	1191
	10	14	dep	1750	1840	3124	3286
	10	19	uep	3654	3842	1220	1284
	10	19	dep	1563	1642	3311	3484
	10	26	uep	3933	4137	940	990
	10	26	dep	1765	1856	3109	3270
M950	10	20	uep	3807	3907	1128	1158
	10	20	dep	1774	1821	3161	3244
	10	32	uep	4178	4288	757	777
M1125	10	32	dep	2004	2056	2931	3009
	25	20	uep	9530	10775	2204	2491
	25	20	dep	4606	5207	7128	8059
	25	24	uep	9906	11200	1828	2066
	25	24	dep	4857	5492	6876	7775
	25	30	uep	10219	11553	1515	1713
25	30	dep	5030	5687	6704	7579	

uep – skrajna górna pozycja haka
dep – skrajna dolna pozycja haka

M2-2 m/3 m

Typ wciągnika	Udźwig [t]	FEM	ISO	Wymiary
M732	6,3	3 m	M6	zobacz M740
M1100	20,0	2 m	M5	zobacz M1125

